



QUICKER THAN EVER. MANOSKOP® 730 QUICK.



QUICKER THAN EVER.

MANOSKOP® 730 Quick – MANOSKOP® 730 is now even more efficient and even easier to use. This new mechanical torque wrench really does live up to its name – »Quick«. The MANOSKOP® 730 Quick puts end users in a position where they can work faster and even more safely with the aid of numerous intelligent optimised details. Amongst other things, STAHLWILLE has improved the ergonomics and user-friendliness of the main controls.

MORE CONVENIENT.

Improved accessibility and operation of the locking lever concealed inside the handle.



SAFE.

The QuickRelease safety lock secures the insert tools while, at the same time, enabling them to be changed quickly and easily – inadvertent release is no longer a risk.

QUICKER.

Ergonomically designed, non-slip adjusters with a thumb recess - for rapid, safe adjustment of the scale to set the required torque.




BETTER ERGONOMICS.

Optimised convex handle for strain-free working. Resistant to oils, grease, fuels, brake fluids and Skydrol.

CLEARER VIEW.

The new design, with opposing V-shaped »sights« and an integrated magnifier, facilitates fast, accurate setting even at an awkward reading angle. With a Vernier scale in N·m/ft·lb or N·m/in·lb.

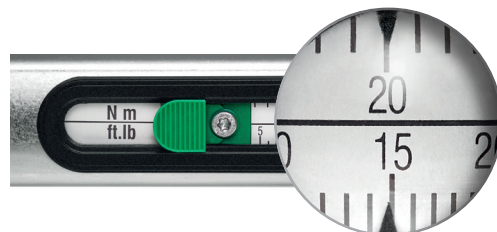

NO NEED FOR MANUAL RESET TO ZERO.

Wear resistant trip system with a flexible rod. In contrast to conventional torque wrenches, it is not necessary to reset the wrench to zero after each job to unload the spring. As a result, users benefit from long-term accuracy and safe measurement results with less time required.



MAGNIFIED.

Magnifying glass integrated into the window enhances readability considerably.



SIMPLE.

Quick adjustment from outside, no disassembly of the torque wrench required.






Additional benefits:

- **Flexible:** Measuring range from 6 to 650 N·m and interchangeable square drive insert tools (9x12 mm, 14x18 mm and 22x28 mm).
- **Protected:** The internal mechanism is extremely resistant to mechanical wear and well protected inside the outer housing against dirt and soiling.



730 Quick Service MANOSKOP® torque wrenches with a mount for insert tools

Code	Gr.			 mm	Ø g
50 18 40 05	5	6-50 N·m	5-36 ft·lb	9x12	805
50 18 40 10	10	20-100 N·m	15-72,5 ft·lb	9x12	965
50 18 40 12	12	25-130 N·m	20-95 ft·lb	14x18	1100
50 18 40 20	20	40-200 N·m	30-145 ft·lb	14x18	1250
50 18 40 40	40	80-400 N·m	60-300 ft·lb	14x18	1880
50 18 40 65	65*	130-650 N·m	100-480 ft·lb	14x18	3280
50 18 45 65	II/65	130-650 N·m	100-480 ft·lb	22x28	3700
50 58 40 05	a/5	6-50 N·m	50-440 in·lb	9x12	805
50 58 40 10	a/10	20-100 N·m	180-880 in·lb	9x12	965
50 58 40 12	a/12	25-130 N·m	225-1150 in·lb	14x18	1100
50 58 40 20	a/20	40-200 N·m	350-1750 in·lb	14x18	1250

* Recommended ratchet insert tool No 735/40HD

